



ASP... GL SERIES:- SANDWICH PREP WITH CANOPY REFRIGERATOR SERIES



ASP1225GL



ASP1225GL: Open glass Canopy. Perspex Slides over pots. Stainless Steel upper front panel with black louvered area covering compressor compartment.

ASP ...GL Series

FEATURES:

- Operating Temperature +0° to +10° C @ Climate class 4
- Salad and Sandwich prep table.
- Stainless steel series 430 exterior doors, lids, fronts and sides.
- Self-closing hinged doors with 90° stay open feature.
- Interior wall louvers provide complete circulation to preserve freshness
- Compartment barrier prevents food spillage down to storage area
- Perspex Slides covering pots. Slides and supports fully removable for easy cleaning.
- LED digital temperature display.
- PVC coated adjustable wire shelves.
- Self-contained system, simple installation
- Pans and cutting boards are included.
- Glass canopy open to rear fitted with ambient mid shelf.
- The equipment is intended for use in an area where the environmental conditions are controlled and maintained such that the ambient temperature typically does not exceed 30°C.

MAIN DATA

Specifications are subject to change without notice. E&OE.

Model	Doors	Net Volume (L)	Shelves	Width (mm)	Depth (mm)	Height (mm)	Voltage	Amps	Cord Length (m)	Shipping Weight
ASP775GL	1	160	1	698	750	1310	240v/50hz	1.54	2.4	80kg
ASP1225GL	2	268	2	1188	750	1310	240v/50hz	2.25	2.4	115kg
ASP1555GL	2	428	2	1529	750	1310	240v/50hz	2.4	2.4	158kg
ASP1800GL	3	440	3	1787	750	1310	240v/50hz	3.71	2.4	175Kg

Head Office: Unit 1/35 Rimfire Drive ,Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com



ASP... GL SERIES:- SANDWICH PREP WITH CANOPY REFRIGERATOR SERIES

Specification

- The ASP...GL Series is based on the standard Sandwich Prep Refrigerators (ASP) with modifications. The standard Stainless steel cover is removed. The ASP is then fitted with a Glass Canopy which is open to the back and fitted with a mid shelf. Perspex sliding lids with removable slides are then fitted to cover the Gastronorm pots. These sliding lids need to be in place to maintain correct pot temperatures.
- **Shelves:** 1 adjustable, PVC coated, steel shelf per door.
- **Construction:** 430 Stainless Steel doors, front, inner tray and sides provide a clean and dent resistant cabinet. Clear anodized aluminium back. Interior white powder coated aluminium for hygienic easy to clean surfaces.
- **Insulation:** 60mm high density polyurethane foam, Blowing agent, Cyclopentane for CFC free Ozone protection and superior insulating properties.
- **Door:** 60mm high pressure injected polyurethane foam. Designed with recessed

handle provides easy access.

- **Gasket:** PVC welded one piece magnetic gasket. Removable without tools for easy cleaning.
- **Hinging:** Self closing with 90° dwell open.
- **Electrical:** Units come ready for connection to 240volt 50hz 10amp GPO. Single Outlet. It is recommended that a dedicated GPO be used.
- **Electronic Controller:** Italian designed and Manufactured, Carel temperature controller. Fitted with 30amp external compressor relay.
- **Refrigeration System:** Fully balanced self-contained condensing unit with forced draught evaporator.
- **Compressor:** ASR's equipment is fitted with [EMBRACO](#) compressors, the world leader in domestic and light commercial compressors.
- **Refrigerant:** R134a.
- **Defrost:** Cyclic defrost with additional off timed defrost. Minimizes risk of ice up situations.

- **Evaporator:** Epoxy coated to minimize the potential of corrosion and thus future gas leaks.
- **Castors:** 125mm heavy duty castors. Front locking.
- Digital Temperature readout.
- **Warranty¹:** Austwide's Manufacturers warranty 12 month parts and labour. No warranty to glass.


Options:

- 6" legs.

Outstanding Benefits

- **Inclusions:** Fitted with oversized Nylon cutting board, complete set of 1/6 gastronorm pots.
- **Pots Included:**
 - ASP775GL — 6 x 1/6 + 2 x 1/9
 - ASP1225GL — 12 x 1/6
 - ASP1555GL — 16 x 1/6
 - ASP1800GL — 18 x 1/6

ELEVATIONS. (not to scale)

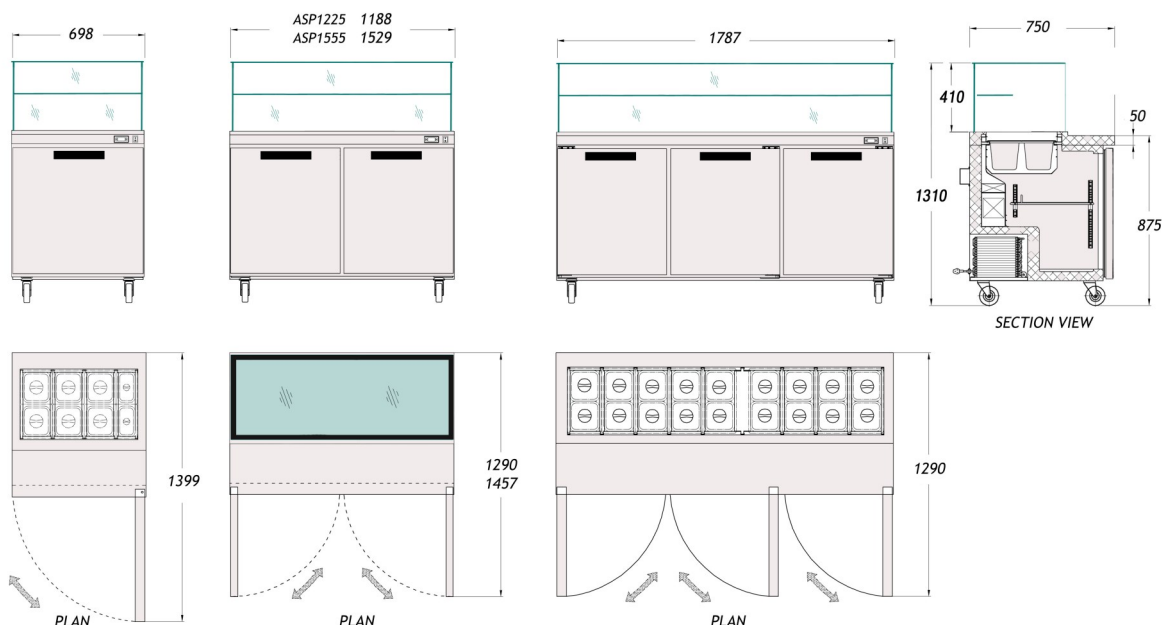

version 201301015a

Head Office: Unit 1/35 Rimfire Drive, Hallam, Vic 3803. Phone: 1800 813 987 Fax: 03 8786 3572
 Email: sales@austwiderentals.com websites: www.austwidesales.com.au or austwiderentals.com

¹terms and conditions apply. Visit web site for full details. www.austwidesales.com.au
 Specifications are subject to change without notice. E&OE. Version 20170717